

VE Series

Features

- 3 φ ~ 18 φ , 85°C , 2,000 hours assured
- Chip type large capacitance capacitors
- Designed for surface mounting on high density PC board
- RoHS Compliance



Marking color: Black

Specifications

Items	Performance													
Category Temperature Range	-40°C ~ +85°C													
Capacitance Tolerance	±20% (at 120Hz, 20°C)													
Leakage Current (at 20°C)	Rated Voltage	6.3 ~ 100V												
	Time	after 2 minutes												
	Case size	3 ~ 10 φ 12.5 ~ 18 φ												
	Leakage Current	I = 0.01CV or 3μA, whichever is greater												
Dissipation Factor (Tanδ at 120Hz, 20°C)	Rated Voltage	4 6.3 10 16 25 35 50 63 100 160 ~ 250 400 ~ 450												
	3 ~ 10 φ	0.42 0.28 0.24 0.20 0.14 0.12 0.10 0.10 0.10 - -												
	12.5 ~ 18 φ	- 0.38 0.34 0.30 0.26 0.22 0.18 0.14 0.10 0.20 0.25												
Low Temperature Characteristics (at 120Hz)	When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase.													
	Impedance ratio shall not exceed the values given in the table below.													
	Impedance Ratio	Rated Voltage		4.0	6.3	10	16	25	35	50	63	100	160 ~ 250	400 ~ 450
		Z(-25°C)	φ D < 12.5	7	4	4	3	2	2	2	2	2	-	-
Z(+20°C)	φ D ≥ 12.5	-	5	5	4	2	2	2	2	2	2	3	6	
	Z(-40°C)	φ D < 12.5	15	8	5	4	3	3	3	3	3	-	-	
Z(+20°C)	φ D ≥ 12.5	-	14	12	10	5	4	3	3	3	6	10		
	* The above Specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 85°C.													
Endurance	Test Time	2,000 Hrs												
	Capacitance Change	Within ±20% of initial value (4V: ±30%)												
	Dissipation Factor	Less than 200% of specified value (4V: ±300%)												
	Leakage Current	Within specified value												
Shelf Life Test	Test time: 1,000 hours; other items are the same as those for the Endurance. The rated voltage shall be applied to the capacitors before the measurements for 160 ~ 450V (Refer to JIS C 5101-4 4.1).													
Ripple Current & Frequency Multipliers	Freq. (Hz)		50	120	1k	10k up								
	Cap. (μF)	Under 1,000	0.80	1.00	1.25	1.40								
	1,000 < C ≤ 6,800	0.85	1.00	1.15	1.25									

Diagram of Dimensions

Fig. 1


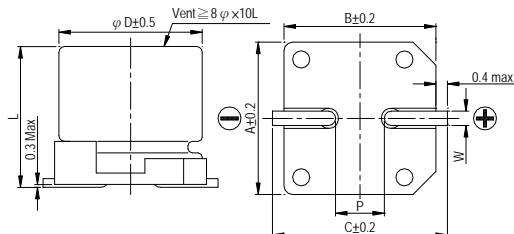


Fig. 2

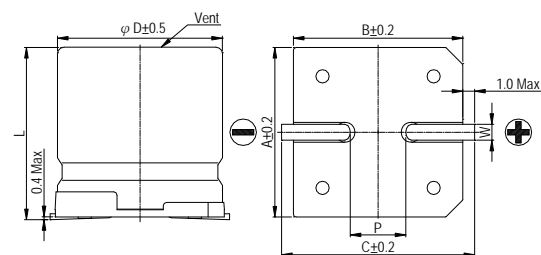


Lead Spacing and Diameter

Unit: mm


φ D	L	A	B	C	W	P ± 0.2	Fig. No.
3	5.3 ± 0.2	3.3	3.3	4.1	0.45 ~ 0.75	0.8	1
4	5.3 ± 0.2	4.3	4.3	5.1	0.5 ~ 0.8	1.0	1
5	5.3 ± 0.2	5.3	5.3	5.9	0.5 ~ 0.8	1.5	1
6.3	5.3 ± 0.2	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
8	10 ± 0.5	8.4	8.4	9.0	0.7 ~ 1.1	3.1	1
8	10.3 ± 0.5	8.4	8.4	9.0	0.7 ~ 1.1	3.1	1
10	7.7 ± 0.3	10.4	10.4	11.0	0.7 ~ 1.3	4.7	1
10	10 ± 0.5	10.4	10.4	11.0	0.7 ~ 1.3	4.7	1
10	10.3 ± 0.5	10.4	10.4	11.0	0.7 ~ 1.3	4.7	1
12.5	13.5 ± 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
12.5	16 ± 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
16	16.5 ± 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
16	21.5 ± 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
18	16.5 ± 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2
18	21.5 ± 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2

Marking


φ D = 3 mm

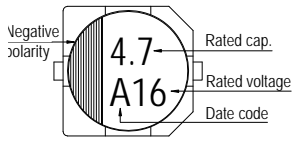


φ D = 4 ~ 6.3mm



φ D = 8 ~ 10 mm



φ D ≥ 12.5mm

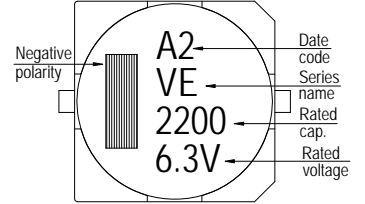

Dimension: φ D × L(mm)

Ripple Current: mA/rms at 120 Hz, 85°C

Dimension & Permissible Ripple Current

μF	V. DC Contents	4V (0G)		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		63 (1J)	
		φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA
1	010																
2.2	2R2													4×5.3	10	4×5.3	8
3.3	3R3													4×5.3	14	4×5.3	12
4.7	4R7					3×5.3	14	3×5.3	14	4×5.3	26	4×5.3	26	4×5.3	20	5×5.3	25
10	100			3×5.3	16	4×5.3	26	4×5.3	26	5×5.3	44	5×5.3	44	5×5.3	35	6.3×5.3	40
22	220	3×5.3	16	4×5.3	26	5×5.3	44	4×5.3	30	5×5.3	47	5×5.3	47	6.3×5.3	50	8×10	139
33	330	4×5.3	31	4×5.3	31	4×5.3	31	5×5.3	55	5×5.3	55	6.3×5.3	67	6.3×7.7	75	8×10	139
47	470	4×5.3	34	4×5.3	34	6.3×5.3	75	5×5.3	55	6.3×5.3	75	6.3×7.7	98	6.3×7.7	75	10×10	200
68	680	5×5.3	58	5×5.3	58	5×5.3	58	6.3×5.3	89	6.3×5.3	89	6.3×7.7	109	6.3×7.7	109	8×10	226
100	101	5×5.3	58	6.3×5.3	89	6.3×5.3	89	6.3×5.3	89	6.3×5.3	89	6.3×7.7	109	8×10	190	10×10	226
150	151												10×7.7	252			
220	221	6.3×5.3	89	6.3×5.3	89	6.3×7.7	124	6.3×7.7	124	8×10	270	8×10	270	10×10	320	12.5×13.5	500
330	331	6.3×7.7	124	6.3×7.7	124	8×10	270	8×10	270	10×7.7	270	10×10	370				
470	471	8×10	290	6.3×7.7	124	8×10	290	8×10	290	10×7.7	290	10×10	400	12.5×13.5	600	12.5×16	600
680	681			10×7.7	290	10×10	410	10×10	410	10×10	400	12.5×13.5	750	12.5×16	740	16×16.5	850
1,000	102			10×10	430	10×10	430	12.5×13.5	750	12.5×13.5	750	16×16.5	1,100	16×16.5	1,000	18×16.5	1,100
2,200	222			12.5×13.5	890	12.5×13.5	890	12.5×13.5	890	16×16.5	1,300	16×16.5	1,300	18×16.5	1,450		
3,300	332			12.5×16	1,000	16×16.5	1,300	16×16.5	1,300	16×16.5	1,300	18×16.5	1,450	18×21.5	1,750		
4,700	472			16×16.5	1,400	16×16.5	1,400	16×16.5	1,400	18×16.5	1,600	18×16.5	1,600				
6,800	682			18×16.5	1,700	16×21.5	1,750	18×16.5	1,700	18×16.5	1,700	18×21.5	2,000				
10,000	103			18×21.5	2,000	18×21.5	2,000										

μF	V. DC Contents	100V (2A)		160V (2C)		200V (2D)		250V (2E)		400V (2G)		450V (2W)	
		φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA
4.7	4R7									12.5×13.5	120	12.5×13.5	120
10	100	8×10	90					12.5×13.5	150	12.5×13.5	120	12.5×16	130
22	220	8×10	90			12.5×13.5	240	12.5×13.5	150	16×16.5	140	16×16.5	140
33	330	10×10	120	12.5×13.5	290	12.5×16	310	12.5×16	240	16×16.5	140	18×16.5	180
47	470	10×10	120	12.5×16	370	16×16.5	420	16×16.5	340	18×16.5	280	18×21.5	250
68	680	12.5×13.5	380	16×16.5	500	16×16.5	420	18×16.5	440	18×21.5	350		
100	101	12.5×13.5	440	18×16.5	650	18×16.5	550	18×16.5	490				
220	221	16×16.5	600	16×21.5	690	16×21.5	590						
330	331	18×16.5	780	16×21.5	850								